


PM 140

Reciprocating Horizontal Triplex Plunger Pumps



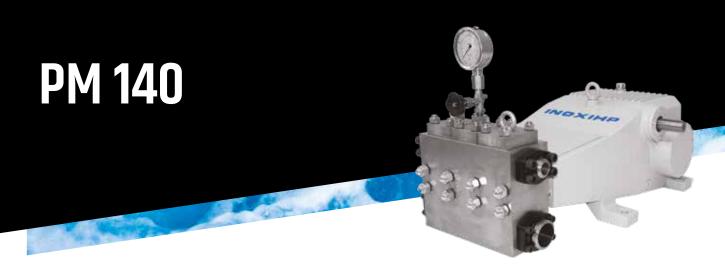

General features

- Compact dimension
- · Splash lubrication and oil level switch
- Easy maintenance
- · Low maintenance costs
- · Internal reduction gear
- · Self-adjusting seal packing
- Available with carbon steel or stainless steel hydraulic head
- 100% aluminium free

Accessories


- Valve lifter controlled by means of pneumatic solenoid
- · Unlouding valve
- Over-pressure valve
- HP check valve
- Suction and/or delivery gauge
- · Low and high pressure switches
- Lubrication system with oil filtration circuit + heat exchanger
- Manifold groups for suction/delivery
- ATEX Group I Category M2 Certification

Applications

- Emulsion Hydraulic power to drive Longwall systems
- Dust suppression systems on Roof Supports & Coal Shearers


Identification code

see tables on the next page > > >

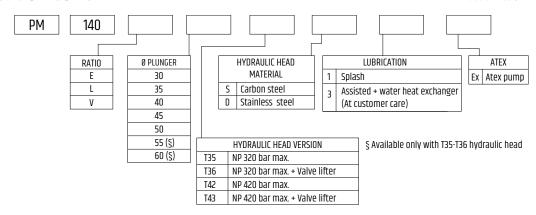

Dimensions


Dimensions are referred to hydraulic head T42 Weight: kg 360

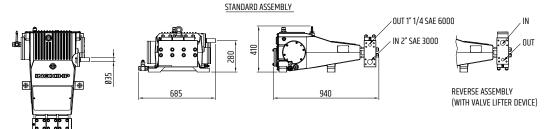




Selection Diagram

PM 140 - 50 Hz 4 POLES ELECTRIC MOTOR (1500 RPM) - MAX ABSORBED POWER 60 kW

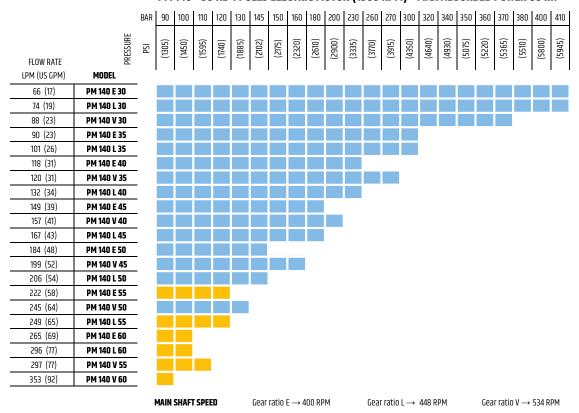

PM 140 - 60 Hz 4 POLES ELECTRIC MOTOR (1800 RPM) - MAX ABSORBED POWER 60 kW

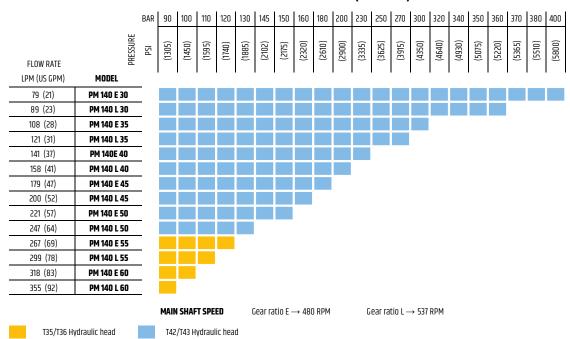

1 MPa = 10 bar. The pump performances are referred to a volumetric efficiency of 100% and a mechanical efficiency of 89%, with water at 20°C. Input speed range 900÷1800 r.p.m. For performances and uses other than the ones listed in this catalogue, please contact INOXIHP technical office for assistance.

REV 03/20 - All images, specifications and dimensions are subject to change without notice, due to continuous research and development

Mining Skid

Inoxihp supplies complete skids for underground coal mining (Longwall) for applications such as tunnel roof support, rotating blade cooling (shearer) and dust suppression.

Highly reliable products, also available in ATEX





